

## Chassis:

### Applications:

The TranScend platform has been deployed for numerous applications:

- ▶ Node segmentation
- ▶ Distribution networks
- ▶ RFoG applications
- ▶ FTTx networks
- ▶ Long haul super-trunking

### Features:

- ▶ High density, 1RU platform
- ▶ Supports four rear facing modules & one power supply
- ▶ Identical slots can support any configuration
- ▶ Hardened -20°C to +75°C version available
- ▶ SNMP remote monitoring
- ▶ AC or DC power supply


### Key Benefits:

- ▶ High packaging density platform
- ▶ Hardened chassis available for -20°C to +75°C operating temperatures
- ▶ Identical slots enable any combination of modules to be installed in any slot
- ▶ Available modules:
  - ▶ EDFAs
  - ▶ Optical & RF switches
  - ▶ Quad frequency stackers
  - ▶ Quad frequency destackers
  - ▶ Quad return receivers
  - ▶ Forward receivers
  - ▶ 1550nm direct modulated transmitters

The TranScend chassis platform features high packaging density, flexibility & operational simplicity. The 1RU chassis accommodates AC or DC power supplies & up to four modules. It is available in standard (TSD) or hardened (TSH) versions for extreme temperature operation over -20°C to +75°C.

The Transcend chassis can be stacked directly on top of each other with no air gap making it an ideal platform for applications where rack space is at a premium.

All slots are identical so any combination of modules can be installed in any slot, allowing for ease of installation & future growth. Integrated software allows for remote monitoring of all the modules via SNMP.

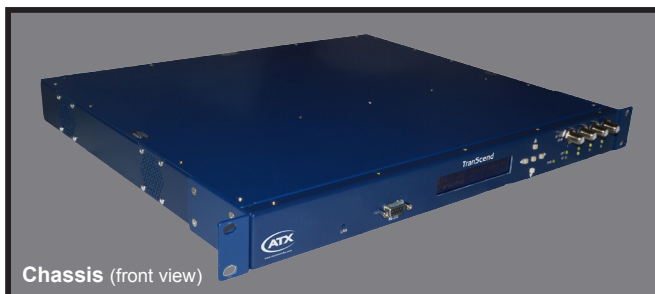

Specifications subject to change without notice.

5850 Hellyer Avenue, San Jose, CA 95138 USA  
Tel (408) 227-2400 Fax (408) 227-3403

www.atxnetworks.com opticalsales@atxnetworks.com